

imageFORCE C7165

A POWERFUL BLEND OF FUNCTIONALITY AND QUALITY

Canon's high performing imageFORCE C7165 performs all of your office activities reliably, securely and more sustainably than before, while boosting your creativity with high quality flyers, posters, brochures, banners and more.

Canon imageFORCE C7165

Colour Multi-Function Device



QUALITY

Bring your print in-house, with production-like quality and media handling

- The imageFORCE C7165 features an office market first with the D² Exposure system providing 4800x2400 dpi true resolution.
- Print sharp eye-catching material with high definition and detail, even with fine small text, on a wide range of media options, including synthetic.
- imageFORCE C7165 MFP's have increased versatility now supporting banner printing up to 1,300mm long.
- Technology taken from production models and predictive algorithms are used to provide accurate image registration and consistent image quality.
- Choice of genuine Adobe PS3 print driver and Fiery controller for greater control of colour management, branding, as well as advance workflow and make ready options.



PRODUCTIVITY

Utilise your business time and resources efficiently with increased workflow productivity

- The imageFORCE Series features an updated, intuitive and modern interface that is eye catching and easy to use.
- The imageFORCE C7165 can be set to automatically recognise the paper type loaded in the multi-purpose tray for ease of use.
- Hot Folders allow users to drag and drop a file into a shared folder. This then automatically prints with pre-defined settings, such as number of copies and finishing requirements.



SECURITY

Safeguarding sensitive information and data - today and for tomorrow

- Canon's Security Environment Estimation technology monitors and assesses the connected network. It then recommends the appropriate network settings to optimise security. The algorithm's are updated regularly by Canon's R&D based machine learning-AI system
- With 'Verify System at Startup', the device boot code#, firmware and applications are all securely verified on startup.
- Storage Drive Lock and SSD FIPS140-3 level encryption as default, provides peace of mind over stored data. The 'Initialize All Data/Settings' feature allows admins to easily remove user data at decommissioning.
- Class leading security support with TPM 2.0, TLS 1.3, HCD-PP, FIPS140-3 and SP800-193 compliant, as well as SIEM support for real-time insights to potential threats.
- Industry leading malware protection utilising Trellix Embedded Control, which protects against the execution of unauthorised applications and other cybersecurity threats.



MOBILITY

Freedom and Flexibility no matter your device

- Mobile workflows are fully supported with Apple® AirPrint®, Android™, Mopria™, IPP Everywhere™ and Canon PRINT Business app for iOS/Android. This allows users to connect, print, scan and capture with ease.
- Simple and easy connectivity with multiple connection options, USB, ethernet and optional Wi-Fi, plus support for approved USB to LAN adaptors for dual ethernet connection.



SUSTAINABILITY

imageFORCE MFP's features responsible design, efficient operation, supporting sustainability goals

- The imageFORCE C7165 engine is now more environmentally friendly, having replaced all (EPS) expanded polystyrene packaging with cardboard. Increased use of recycled plastic, now reaching 30%.
- Canon's office finishers support both standard stapling and Eco (staple-free) stapling. This helps reduce staple costs while supporting environmentally friendly document production and management.
- Low TEC energy consumption is attained with a combination of Canon's On-Demand fixing technologies, Sleep Recovery triggers, low noise-energy efficient motor control and low-melting point toner technologies. Minimising power consumption and assisting with quick warm-up times.



INTEGRATION

Seamlessly integrate with key line-of-business systems to fast track your digital transformation journey

- Personalised workflows allow users to pick and choose what works best for them in terms of functionality.
- Canon's powerful Multifunctional Embedded Application Platform (MEAP), combined with a common source code for firmware, ensures that IT and office automation is smoothly aligned.
- Efficiently digitise documents with automated workflows connected to applications such as OneDrive, SharePoint, Concur, DropBox, Google Drive and Microsoft Teams*.

*The boot code will be self repaired automatically if validation fails upon start up.

* For more information visit: uniflowonline.com/en/products/uniflow-online/

CLOUD CONNECTOR

An optional add-on licence to your MFD to print from and scan to your preferred cloud destination

- Print files from email or cloud destinations^{*1}
- Digitise scanned documents and save to your cloud destination simply and easily
- Supported on all imageFORCE Series devices^{*1}



Easy to install, easy to use, Canon imageFORCE C7165 applications that connect to various cloud services




*1 Please refer to the link for supported devices and file formats: canon.com.au/other-products/cloud-connector



CONFIGURATION

This flat configuration is for illustration purposes only. For a complete list of options and the exact compatibility relationships, please refer to the [online product configurator](#).

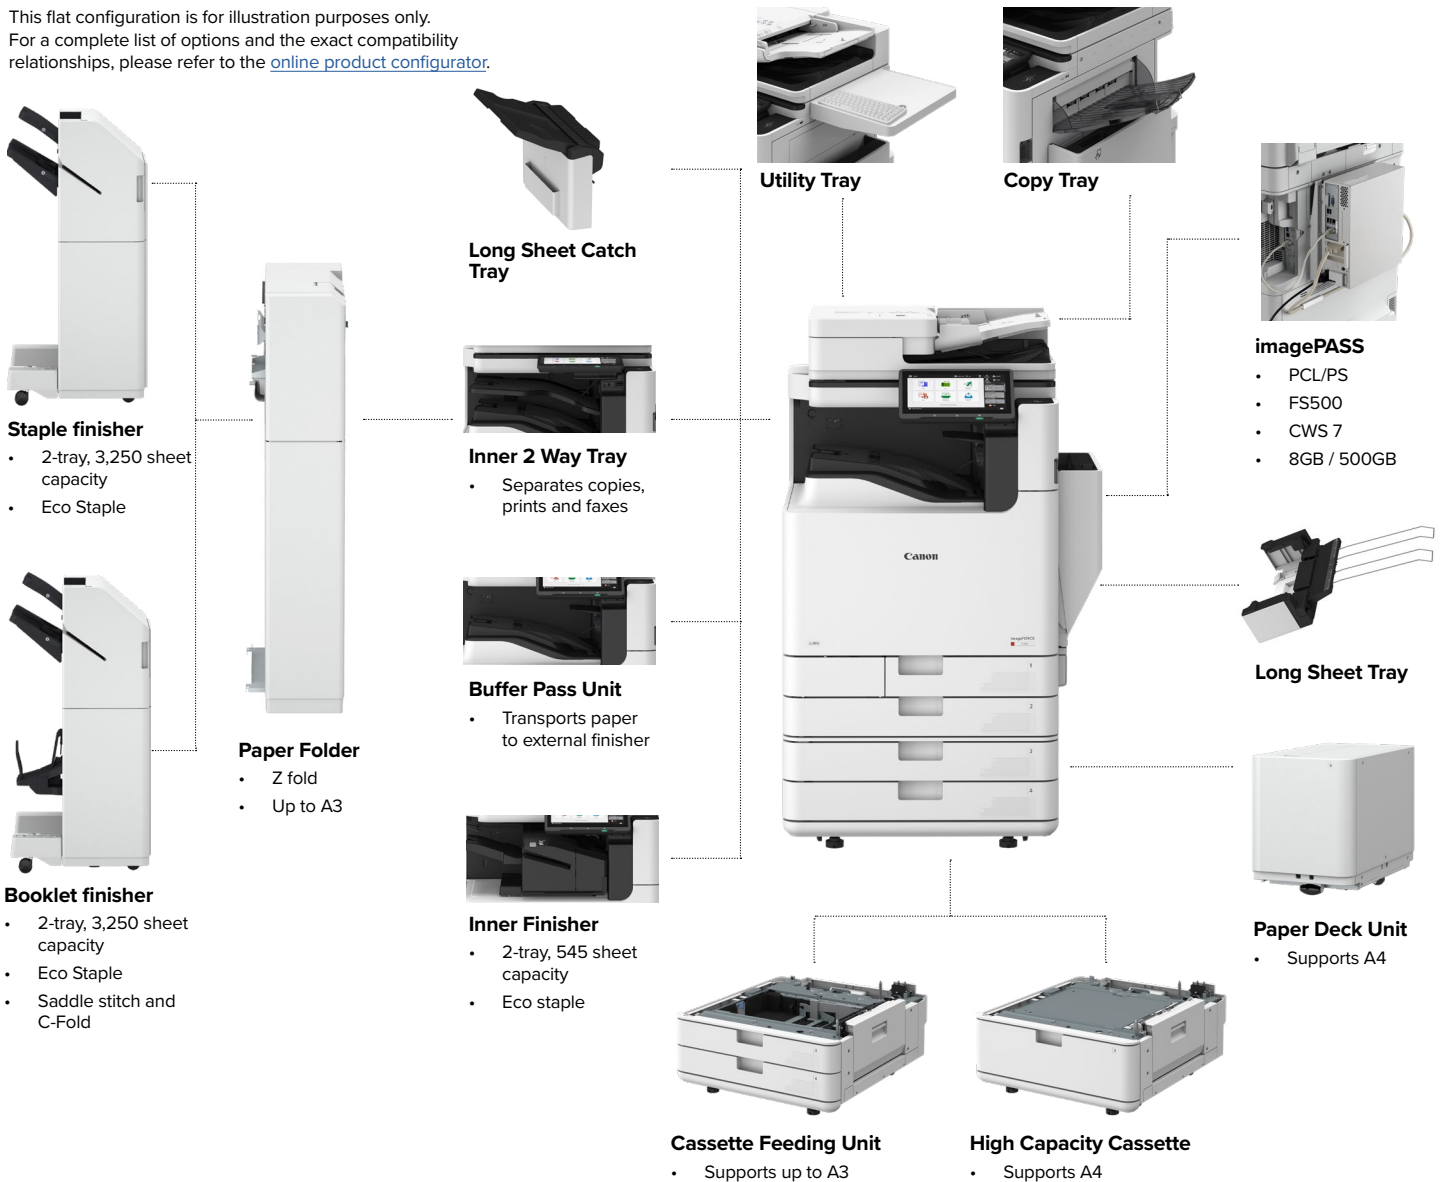

imageFORCE C7165 Specifications

Main Unit	
Machine Type	A3 Colour Multifunctional
Core Function	Print, Copy, Scan, Send, Store and Optional Fax
Processor	1.8GHz Dual Core
Control Panel	10.1" TFT LCD WSVGA Colour Touch Panel
Memory	Standard: RAM: 6.0GB
Storage	Standard: 250 GB (SSD) Optional: 1TB (SSD)

Interface Connection	Network: Standard: 1000Base-T/100Base-TX/10Base-T Optional: Wireless LAN (IEEE 802.11a/b/g/n/ac/ax) Others: Standard: USB 2.0 (Host) x1, USB 3.0 (Host) x1, USB 2.0 (Device) x1 Optional: Serial Interface, Copy Control Interface
----------------------	---

Paper Supply Capacity (A4, 80gsm)	Standard: 1,200 Sheets 100-Sheets: Multi-purpose Tray x1 550-Sheets: Paper Cassette x2 Maximum: 6,350 sheets (with High Capacity Cassette Feeding Unit-F1 + Paper Deck Unit-F2)
-----------------------------------	--

Paper Output Capacity*	Standard: 250 sheets Maximum: 3,450 Sheets (with Staple Finisher-AB3 or Paper Folding/Booklet Finisher-A2 and 3rd Copy Tray Kit-A1)
------------------------	--

Finishing Capabilities	Collate, Group, Offset, Staple, Saddle Stitch, Hole Punch, Eco Staple, Staple On Demand (Finishing capabilities vary depending on the options connected.)
------------------------	---

Supported Media Types	Multi-purpose tray: Thin, Plain, Recycled, Eco, Colour, Heavy, Coated, Tracing, Bond, Transparency, Label, Pre-punched, Letterhead, Tab, Envelope, Water Resistant Paper Cassette (Upper/Lower): Thin, Plain, Recycled, Eco, Colour, Heavy, Bond, Transparency, Pre-punched, Letterhead, Envelope* * Envelope Feeder Attachment (standard) is required
-----------------------	--

Supported Media Sizes	Multi-purpose tray: Standard size: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 98.0 x 139.7 mm to 320.0 x 457.2 mm Free Size: 98.0 x 139.7 mm to 320.0 x 457.2 mm Long sheet*: 98.0 x 457.3 mm to 320.0 mm x 1,300.0 mm Envelopes: COM10 No.10, Monarch, DL, ISO-C5 Envelope custom size: 98.0 x 90.0 mm to 320.0 x 457.2 mm * Long Sheet Feeding Tray-B1 is required Upper Cassette: Standard size: A4, A5, A5R, A6R, B5 Custom size: 98.0 x 148.0 mm to 297.0 x 215.9 mm Envelopes: COM10 No.10, Monarch, DL, ISO-C5 Lower Cassette: Standard size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 98.0 x 148.0 mm to 304.8 x 457.2 mm Envelopes: COM10 No.10, Monarch, DL, ISO-C5
-----------------------	--

Supported Media Weights	Multi-purpose tray: 52 to 300 gsm Paper Cassette (Upper): 52 to 256 gsm Paper Cassette (Lower): 52 to 300 gsm Duplex: 52 to 256 gsm (Coated 106 to 220 gsm) For details of supported media, refer to the 'Available Paper' in the User Manual
-------------------------	---

Warm-up Time	Quick Startup Mode: 4 Seconds or less* * Time from device power-on to when the copy icon appears and is enabled to operate on the touch panel display. From Sleep Mode: 7 Seconds or Less From Power On: 6 Seconds or less* * Time from device power-on, until copy ready (not print reservation)
--------------	--

Dimensions (W x D x H)	723 x 722 x 937 mm
------------------------	--------------------

Installation Space	Depends on configuration. Please refer to the online Product Configurator
--------------------	---

Weight	Approx. 117 kg (including toner)
--------	----------------------------------

Print Specifications

Print Speed (BW)	Up to 65 ppm*2 (A4, A5 ¹ , A5R, A6R ¹), up to 33 ppm (A3), up to 42 ppm (A4R) *1-sided only. *2 up to 70ppm when paper feed from 1st Cassette and Paper Deck Unit-F2 and High Capacity Cassette Feeding Unit-F1
------------------	--

Print Resolution (dpi)	4,800 x 2,400
------------------------	---------------

Page Description Languages	Standard: UFR II, PCL5/PCLE Optional: Adobe® PostScript®3™
----------------------------	---

Direct Print (RUI)	Supported file types: PDF, EPS, TIFF/JPEG, and XPS
--------------------	--

Printing from Mobile and Cloud Applications	AirPrint, Mopria, IPP Everywhere, Canon PRINT, uniFLOW Online, Universal Print and Cloud Connector
---	--

A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information

OS Standard Printing	Android/Windows® 10/Windows® 11/ChromeOS™/macOS® (11.2.2 or later) /iOS® (15.2 or later) /iPadOS®
----------------------	---

Fonts	PS fonts: 136 Roman PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andale Mono WT J/K/S/T ⁴ (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts ² *1 Optional PCL International Font Set-A1 is required. *2 Optional Barcode Printing Kit-D1 is required.
-------	--

Print Features	Secured Print, Secure Watermark, Header/Footer, Page Layout, Two-sided Printing, Mixed Paper Sizes/ Orientations, Front/Back Covers, Toner Reduction, Poster Printing, Forced Hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer
----------------	---

Operating System	UFR II: Windows® 10/11/Server2016/Server2019/Server2022, macOS® X(10.14 or later) PCL: Windows® 10/11/Server2016/Server2019/Server2022 PS: Windows® 10/11/Server2016/Server2019/Server2022, macOS® X(10.14 or later) PPD: Windows® 10/11/Server2016/Server2019/Server2022, macOS® X(10.14 or later) As of Nov. 2023
------------------	---

Copy Specifications

Copy Speed (BW and CL)	Up to 65 ppm*2 (A4, A5 ¹ , A5R, A6R ¹), up to 33 ppm (A3), up to 42 ppm (A4R) *1-sided only. *2 up to 70ppm when paper feed from 1st Cassette and Paper Deck Unit-F2 and High Capacity Cassette Feeding Unit-F1
------------------------	--

First-Copy-Out Time (A4, BW/CL)	Approx. 2.7 / 3.7 seconds or less
---------------------------------	-----------------------------------

Copy Resolution (dpi)	600 x 600
-----------------------	-----------

Multiple Copies	Up to 999 copies
-----------------	------------------

Copy Density	Automatic or Manual (9 Levels)
--------------	--------------------------------

Magnification	Variable zoom: 25% to 400% (1% increments)
---------------	--

Copy Features	Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Book to Two Pages, Two-sided Original, Job Build, N on 1, Add Cover, Insert Sheets, Different Size Originals, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Gutter, Print & Check, Negative/Positive, Repeat Images, Merge Job Blocks, Mirror Image, Store in Mail Box, Superimpose Image, Copy ID Card, Skip Blank Pages, Free Size Original, Color Mode, Reserved copy, Copy Sample
---------------	--

Scan Specifications

Type	Single-pass Duplexing Automatic Document Feeder* [2-sided to 2-sided (Automatic)] * Multi-Sheet Feed Detection is supported.
------	---

Document Feeder Paper Capacity (80gsm)	Up to 200 Sheets
--	------------------

Document Feeder acceptable paper weight	Document Feeder media weight: 38 to 220 gsm* (BW, CL) *An acceptable weights of A6R or smaller is 50 to 220 gsm
---	--

Supported Media Sizes	Platen scanning size: Up to 297.0 x 431.8 mm Document Feeder media size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, B6R Custom size: 69.9 x 139.7 mm to 304.8 x 431.8 mm
-----------------------	---

Scan Speed (ipm: BW/CL; A4)	1-sided Scanning: 135/135 (300 x 300 dpi, send), 80/80 (600 x 600 dpi, copy), 2-sided Scanning: 270/270 (300 x 300 dpi, send), 160/90 (600 x 600 dpi, copy)
-----------------------------	--

Scan Resolution (dpi)	600 x 600
-----------------------	-----------

Pull Scan Specifications	Color Network ScanGear2 for both TWAIN and WIA Supported OS: Windows® 10/11/Server 2016/Server 2019/Server 2022 As of Nov. 2023
--------------------------	---

Scan Method	Push Scan, Pull Scan, Scan to Box, Scan to Advanced Box, Scan to Network, Scan to USB Memory Key, Scan to Mobile devices, Scan to cloud (uniFLOW Online)
-------------	--

Send Specifications

Destination	Standard: E-mail/Internet FAX (SMTP*), SMB, FTP, WebDAV, Mail Box Optional: Super G3 FAX, IP Fax * Available OAuth 2.0 authentication method on Microsoft 365 and Google Workspace
-------------	--

Address Book	LDAP (2,000)/Local (1,600)/Speed dial (200)
--------------	---

Send Resolution (dpi)	Push: Up to 600 x 600 Pull: Up to 600 x 600
-----------------------	--

Communication Protocol	File: FTP(TCP/IP), SMB3.11 (TCP/IP), WebDAV E-mail/Fax: SMTP, POP3
------------------------	---

File Format	TIFF(MMR), JPEG*, PDF(Compact, Searchable, Optimize for Web, PDF/A-1b, Trace & Smooth, Encrypted, Device Signature, User Signature), XPS(Compact, Searchable, Device Signature, User Signature), Office Open XML (PowerPoint, Word) * Only Single page
-------------	---

Universal Send Features	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Copy Ratio, Erase Frame, Job Build, Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Pages
-------------------------	---

Fax Specifications

Maximum Number of Connection Lines	2
------------------------------------	---

Modem Speed	Super G3: 33.6 kbps G3: 14.4 kbps
-------------	--------------------------------------

Compression Method	MH, MR, MMR, JBIG
--------------------	-------------------

Resolution (dpi)	400 x 400 (Ultra Fine), 200 x 400 (Super Fine), 200 x 200 (Fine), 200 x 100 (Normal)
------------------	--

Sending/Receiving Size	Sending: A3, A4, A4R, A5 ¹ , A5R ¹ , A6R ¹ , B4, B5 ² , B5R ¹ Receiving: A3, A4, A4R, A5, A5R, B4, B5, B5R ¹ Sent as A4 ² Sent as B4 short
------------------------	--

FAX Memory	Up to 30,000 pages (2,000 Jobs)
------------	---------------------------------

Speed Dials	Max. 200
-------------	----------

Group Dials/Destinations	Max. 199 Dials
--------------------------	----------------

Sequential Broadcast	Max. 256 Addresses
----------------------	--------------------

Memory Backup	Yes
---------------	-----

Fax Features	Sender's Name (TTI), Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox, 2 on 1 Log
--------------	--

Store Specifications

Mail Box (Number Supported)	100 User Inboxes, 1 Memory RX Inboxes, 50 Confidential Fax Inboxes Maximum 10,000 Pages (2,000 jobs) Stored
-----------------------------	--

Advanced Box	Communication Protocol: SMB or WebDAV Supported Client PC: Windows® 10/11 Concurrent Connections (Max.): SMB:64, WebDAV:3
--------------	---

Advanced Box Available Disc Space	Standard: 16 GB Approx. (With option: max. 480GB)
-----------------------------------	--

Advanced Box Features	Authentication for Advanced Box Log-in, Sort Function, Printing a PDF File with a Password, Search, File Preview, Authentication Management, Open to public, URI TX, Backup/Restore
-----------------------	---

Security Specifications

Authentication and Access Control	User Authentication (Picture Login, Picture and PIN Login, Card Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online/uniFLOW/PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Cloud Connector (PIN Login), Microsoft Entra ID (PIN Login, Card Login), Two-Factor Authentication at LUI/RUI, Access Management System (Access Control)
-----------------------------------	--

Document Security	Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print ¹), Receive Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS, Adobe LiveCycle [®] Rights Management ES2.5 Integration), BOX Security (Mail Box Password Protected, Advanced Box Access Control), Send Data Security (Setting for requesting password input per transmission, Restricted E-mail/File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support), Document Tracking (Secure Watermark) ¹ Requires uniFLOW Online / uniFLOW
-------------------	--

Network Security	TLS 1.3, IPsec, IEEE802.1X authentication, SNMP V3.0, Firewall Functionality (IP/MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), up to WPA3(using Wi-Fi), Enabling/Disabling (Network Applications, Remote UI, USB Interface), G3 FAX separation from LAN, USB Port separation from LAN, Prohibit the execution of files stored in Advanced Space in the MFP. Scan and Send -Virus Concerns for E-mail Reception
------------------	--

Device Security	Protecting SSD Data [SSD Data Encryption (FIPS140-3), SSD Lock], Standard SSD Initialize, Initialize (NIST 800-88 PURGE LEVEL), Trusted Platform Module (TPM 2.0), Job Log Conceal Function, Protecting MFP Software Integrity: Verify System at Startup (NIST SP800-193: Protection), Checking MFP Software Integrity & Platform Firmware Resiliency: Automatic System Recovery (NIST SP800-193: Recovery), Runtime Intrusion Detection: Trellix Embedded Control, HCD-PP Common Criteria Certification ¹ ¹ Validation pending
-----------------	--

Device Management and Auditing	Administrator Password, Digital Certificate And Key Management, SAN certificates, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Image Data Logging, Security Policy Setting
--------------------------------	---

Environmental Specifications

Operating Environment	Temperature: 10 to 30 °C Humidity: 20 to 80 % RH (Relative Humidity)
-----------------------	---

Power Source	220-240 V, 50/60 Hz, 6 A
--------------	--------------------------

Power Consumption	Maximum: Approx. 2,000 W Sleep mode: Approx. 0.5 W ¹ Typical Energy Consumption (TEC) ² rating 0.71 kWh ¹ 0.5 W is not available in all circumstances due to certain settings. ² As per USA Energy Star V3.0
-------------------	--

Consumables	
-------------	--

Toner Cartridges	Toner 3001 BK/C/M/Y
------------------	---------------------

Toner	Toner 3001 BK: 37,500 pages
-------	-----------------------------

(Estimated Yield @ 8.5% Coverage)	Toner 3001 C/M/Y: 27,500 pages
-----------------------------------	--------------------------------

Software and Printer Management

Tracking and Reporting	uniFLOW Online/uniFLOW
Remote Management Tools	iW Enterprise Management Console Monitoring Service Remote Distribution & Management Service Status Monitor
Scanning Software	Color Network ScanGear 2
Optimisation Tools	Canon Driver Configuration Tool
Platform	MEAP (Multifunctional Embedded Application Platform)

Fiery Print Controller Specifications (Embedded)

Optional/Standard	Optional
Name	imagePASS-T1 (Embedded)
Print Resolution (dpi)	1200 x 1200, 600 x 600
Page Description Language(s)	Adobe PS3, PCL6, Adobe PDF Print Engine (Optional)
Memory	8GB (4GBx2)
Hard Disk Drive	500 GB SATA
Processor Speed	Intel Pentium Gold 5400 (3.7GHz)
System	FS500
Fonts	PS: 138 Fonts PCL: 113 Fonts
Supported Operating Systems	Windows10 32bit* and 64 bit , Windows11, Windows Server 2016, Windows Server 2019, Windows Server 2022, macOS* 10.15, 11.0, 12, 13, 14 * Windows10 32bit are supported by printer driver only.
Interface	2 x Ethernet (1000Base-T/100Base-TX/10Base-T), USB3.0 x 2 (Rear)
Network protocols	TCP/IP (FTP, SMTP, POP, HTTP, SNMP, LDAP, SLP, SMB, LPD, IPP, WS-Discovery, Bonjour, Direct Mobile Printing, Port9100, SNT, 802.1X, DHCP, DNS, NTP)
Direct Print	PDF1.7, EPS, TIFF6, JDF1.4/JMF (Optional)
VDP	FreeForm v1, v2.1
Fiery Print Controller Standard Features	Fiery Command WorkStation 7, Paper Catalog, Fiery Spot-On, Fiery Remote Scan, Fiery Hot Folders & Virtual Printers
Fiery Print Controller Options	Fiery Impose, Fiery Compose, Fiery Impose and Compose, Fiery Automation package Fiery ColorRight package, Fiery JobExpert and PDF Processing Kit
HW Platform	E500
Base OS	Debian of Linux
Power source	AC100-240V, 50/60Hz; 1.5A (100V) - 1.0A (240V)
Maximum Power consumption	55W

Paper Supply Options

Cassette Feeding Unit-AW1	Paper Capacity: 2 x 550 sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Eco, Colour, Heavy, Bond, Transparency, Pre-punched, Letterhead Paper Size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 98.0 x 148.0 mm to 304.8 x 457.2 mm Paper Weight: 52 to 300 gsm
High Capacity Cassette Feeding Unit-E1	Paper Capacity: 2,450 sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Eco, Colour, Heavy, Bond, Pre-punched, Letterhead Paper Size: A4 Paper Weight: 52 to 300 gsm
Paper Deck Unit-F2	Paper Capacity: 2,700 sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Colour, Heavy, Pre-punched Paper Size: A4, B5 Paper Weight: 52 to 256 gsm

Output Options*

Inner 2way Tray-M1	Tray Capacity (with 80 gsm paper): A4, A5, A5R, A6R, B5: 100 sheets SRA3, A3, A4R, B4, B5R: 50 sheets Paper Weight: 52 to 300 gsm
3rd Copy Tray Kit-A1	Capacity (with 80gsm paper): A4, A5R, B5: 100 sheets A3, A4R, B4, B5R: 75 sheets Paper Weight: 52 to 300 gsm
Inner Finisher-N1	Tray Capacity (with 80gsm paper): Upper Tray: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R : approx. 45 sheets long sheet length of up to 900.0 mm: 1 sheet Lower Tray: A4, A5, A5R, B5: approx. 500 sheets A3, A4R, B4, B5R: 250 sheets A6R: 30 sheets SRA3, Envelope: 10 sheets Paper Weight: 52 to 300 gsm Staple Position: Corner, Double Staple Capacity: (52 to 90 gsm) A4, B5: 50 sheets A4R: 40 sheets A3, B4: 30 sheets Eco Staple: A3, A4, B4, B5: 10 sheets (52 to 64 gsm) 8 sheets (65 to 81.4 gsm) 6 sheets (82 to 105 gsm) Staple On Demand: approx. 40 sheets (80 gsm)

Staple Finisher-AB3	(Requires Buffer Pass Unit-R1) Tray Capacity (with 80gsm paper): Upper Tray: A4, A5, A5R, A6R, B5: approx. 250 sheets SRA3, A3, A4R, B4, B5R: approx. 125 sheets Lower Tray: A4, A5, A5R, B5: 3,000 sheets SRA3, A3, A4R, B4, B5R: 1,500 sheets A3, B4 (Z-fold*): 30 sheets A4R (Z-fold*): 10 sheets A6R: 250 sheets Envelopes: Monarch: 30 sheets, COM10 No.10, DL, ISO-C5: 100 sheets Long sheet length of up to 1300.0 mm: 20 sheet, ejected to the top of the Buffer Pass Unit-R1 and Staple Finisher-AB3) Paper Weight: Upper Tray: 52 to 256 gsm Lower Tray: 52 to 300 gsm Staple Position: Corner, Double Staple Capacity: (52 to 90 gsm) A4, B5: 65 sheets A4R: 40 sheets A3, B4: 30 sheets Eco Staple: A3, A4: 10 sheets (52 to 64 gsm) 8 sheets (65 to 81.4 gsm) 6 sheets (82 to 105 gsm) Staple On Demand: 65 sheets (52 to 90 gsm) * Paper Folding Unit-L1s required
Paper Folding/Booklet Finisher-A2	(Requires Buffer Pass Unit-R1) (Includes the above Staple Finisher-AB3 basic staple specifications.) Saddle Stitch V-fold paper size: A3, A4R, B4 C-fold paper size: A3, A4R, B4 Saddle Stitch Staple Capacity: 20 sheets x 10 sets (52 to 81.4 gsm) (including 1 cover sheet 52 to 256 gsm) V-fold Capacity: up to 5 sheets (52 to 105 gsm) C-fold Capacity: A4R: up to 6 sheets (52 to 90 gsm) up to 5 sheets (91 to 128 gsm) A3, B4: up to 5 sheets (64 to 128 gsm)
Paper Folding Unit-L1	(Requires either the Staple Finisher-AB3 or Paper Folding/Booklet Finisher-A2) Paper size: A3, A4R, B4
Inner 2/3 Hole Puncher-D1	(Requires the Inner Finisher-N1) Two or Three Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Two holes: A3, A4, A4R, A5, B4, B5, B5R Three holes: A3, A4, B4, B5
2/3 Hole Puncher Unit-A1	(Requires either the Staple Finisher-AB3 or Paper Folding/Booklet Finisher-A2) Two or Three Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Two holes: A3, A4, A4R, A5, B4, B5, B5R Three holes: A3, A4, B4, B5
2/4 Hole Puncher Unit-A1	(Requires either the Staple Finisher-AB3 or Paper Folding/Booklet Finisher-A2) Two or Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Two holes: A3, A4, A4R, A5, B4, B5, B5R Four holes: A3, A4

Hardware Accessories

Card Readers	IC Card Reader Box for Numeric Keypad-A1
Others	Tab Feeding Attachment-F1 Buffer Pass Unit-R1 (Required with the Staple Finisher-AB3 or Paper Folding/Booklet Finisher-A2) Utility Tray-B1 Numeric Keypad-A2

System and Controller options

Print Accessories	PS Printer Kit-BE13 PCL International Font Set-A1 Barcode Printing Kit-D1
Fax Accessories	Super G3 FAX Board-AX2 Super G3 2nd Line Fax Board-BQ1 Remote Fax Kit-A1 IP FAX Expansion Kit-B1
Storage Accessories	250GB SSD-A1 1TB SSD-A1 Memory Mirroring Kit-A1/A2/A3
Interface Accessories	Wireless LAN Board-H1 Wireless LAN 5GHz-A1 (Requires the Wireless LAN Board-H1) Copy Control Interface Kit-A1 Serial Interface Kit-K3
Other Options	
Accessibility Accessories	ADF Access Handle-A1 Voice Operation Kit-D1
Staple Cartridges	Staple Cartridge-P1 (Used in the Staple Finisher-AB3 or Paper Folding/Booklet Finisher-A2) Staple Cartridge-Y1 (Used in the Paper Folding/Booklet Finisher-A2) Staple Cartridge-Z1 (Used in the Inner Finisher-N1)
Heater Options	Reader Heater Unit-Q3 Paper Deck Heater-C1 (Requires the Side Paper Deck-F2)



To view online manuals describing the features and operations of Canon imageFORCE, please refer to the [Online User Manual Portal](#).

POWERED BY

Trellix

uniFLOW
online

Canon Australia Pty Ltd
1800 444 199
canon.com.au/business

Canon New Zealand Ltd
0800 222 666
canon.co.nz/business

Canon